
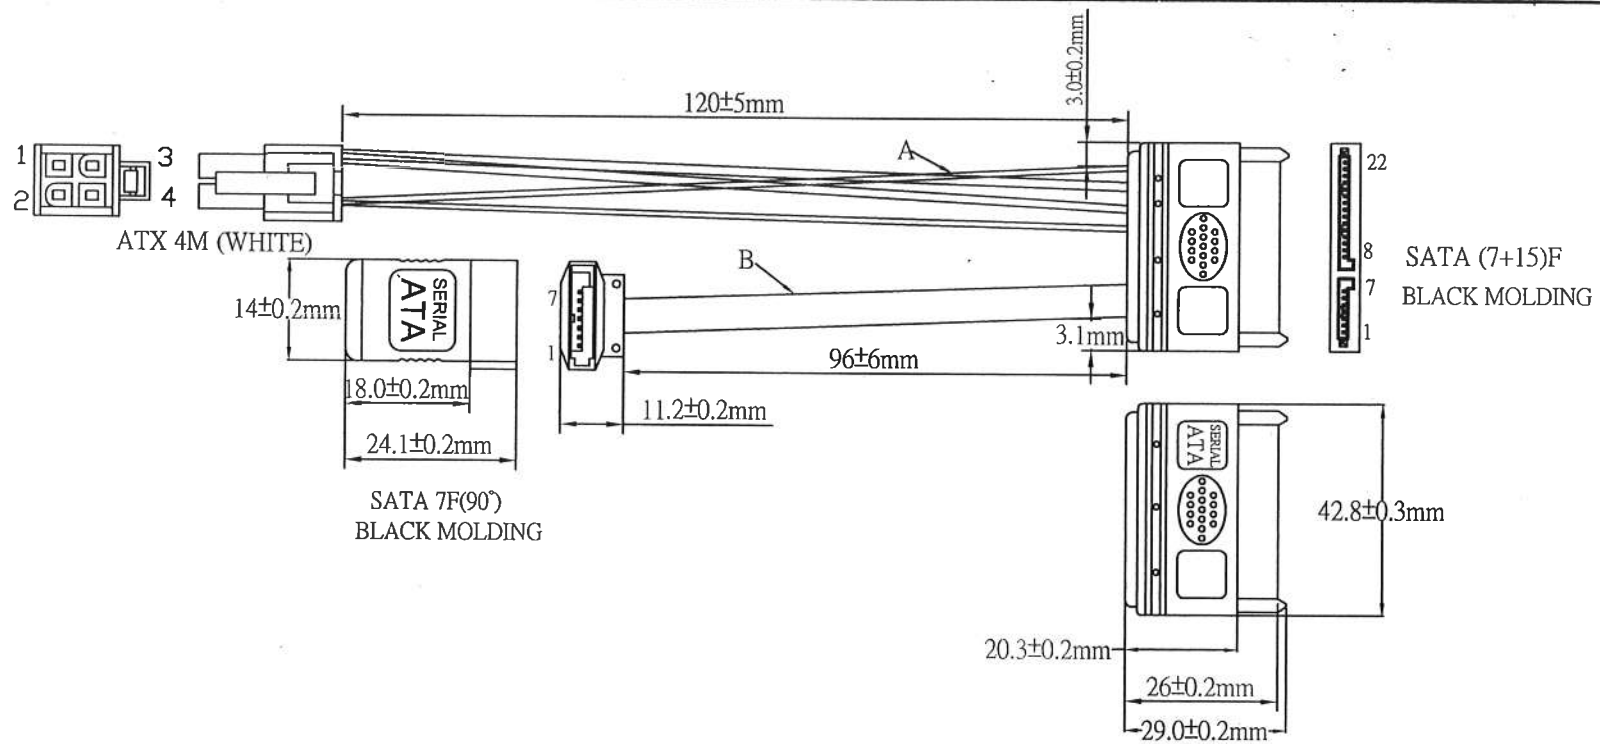


第 3 角法



NOTE:

- CABLE: (A)20#,UL1007,RED/BLACK/BLACK/YELLOW COLOR,PVC JACKET.
(B)UL2725,(26#*2C+AL/MY+2*D)*2F,OD=2.4*8.0mm,RED COLOR,PVC JACKET.
- LENGTH:120mm/96mm(SR-SR)
- CONNECTOR:SATA (15+7)F*1PCS(BLACK INSULATOR),SATA 7F*1PCS(BLACK INSULATOR,90°),ATX 4M*1PCS(WHITE).
- MOLD:BLACK MOLDING/ASSEMBLY.
- CONTACTS:

SATA (7+15)F	8+9+10	11+12+13	14+15+16	17+18+19	20+21+22
ATX 4M	X	2 BLACK	1 RED	3 BLACK	4 YELLOW

SATA (7+15F)	1	2	3	4	5	6	7
SATA 7F	1	2	3	4	5	6	7
	GND (1)		GND (2)			GND (4)	
				GND (3)			

6. TEST REQUEST:100%

- OPEN SHORT
- CT<=1Ω, IS>=20MΩ,
- HV:DC 300V TIME:0.1SEC

ROHS COMPLIANT

△	· ·			承認 APPR. BY	検認 INSP. BY	照査 COLLA. BY	照査 MODEL	照査 MATERIAL		
△	· ·						照査 PART NO.	照査 QTY.	照査 SCALE	
△	· ·			検図 CHJK. BY	· ·		照査 PART NAME			
△	· ·			設計 DES. BY	· ·					
	年月日 DATA	訂正事項 DESCRIPTION OF REVISIONS	署名 SIGN	製図 DRAWN BY	2010.11.09	(石本)	千年エンジニアリング株式会社			